

User Manual

Table of Contents

1.Function introduction

2.Getting Start

3.Add/Edit/Delete device

4.Live View

5.PTZ Control

6. Set up

7. Help and support.


1. Function introduction

This app allows iphone/Android user to view and control live video streams from IP Cameras, NVR ,DVR,HVR.






1. Stream Videos over WIFI or 3G
2. View up to 9 live video streams
3. Device management.
4. Snapshot and browse picture
5. Record and playback video
6. PTZ control
7. Alarm video push
8. Audio and Talkback.
9. Query and remote playback
10. P2P and QR code scan

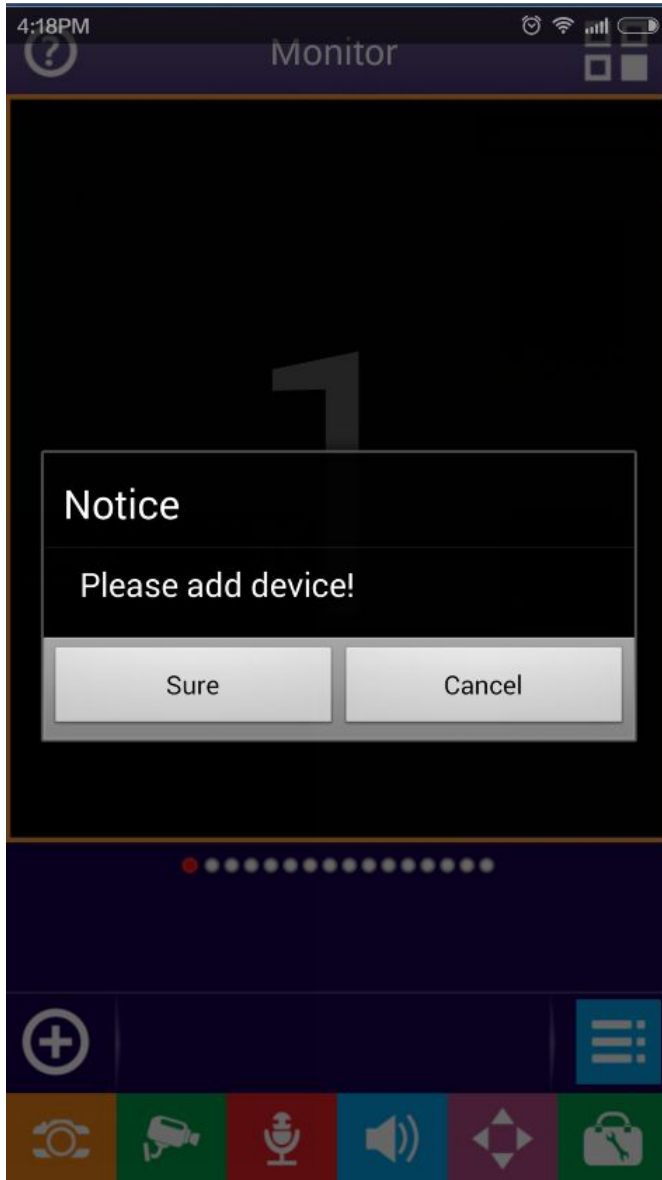















2. Getting Start

Connect your iphone to the 3G or WIFI network. Run this app, and you will see main interface.(as the below pictures)





Panel button description

Button icon	Function description
	Add a new device
	Device List
	Snapshot and Record files
 	PTZ:UP


 Down	PTZ: Down
 Right	PTZ: Right
 Left	PTZ: Left
 Enlarge	Zoom In
 Shrink	Zoom Out
 Focus+	Focus Add
 Focus-	Focus Minus
 Aperture+	Iris Add
 Aperture-	Iris Minus
	Snapshot
	Start/Stop Record
	Local Settings
	User guide
	Audio
	Talkback
	Choose window


3. Add/Edit/Delete device

• Add Device

Tap , or  then you will have the two way below to add: two-dimensional code scanning and manually enter.(as the below picture)



(1) when you click , it will go to code scan. Please point the camera of mobile phone directly to the code until it scan the code. When the code scanning is successful, you will get the below picture.

Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
Address	The P2P ID, Obtained by code scanning
Port	DVR's mobile port, 6003 by default
User	DVR's user name, Admin by default
Password	DVR's password, no password by default
Alarm(video push)	Turn on or off the video push function
Channel Number	Select the channel number, when assign  , the app will set the number automatically.

(2) When you click “manual”, you will see below picture.


The screenshot shows the 'EditDevice' screen in a mobile application. At the top, there is a navigation bar with a back arrow on the left and a checkmark on the right. Below the navigation bar is a text input field containing the word 'device'. The main content area is divided into several sections. The first section contains three input fields: 'IPAddress' with the value 't88888888', 'User' with the value 'Admin', and 'Password' with the value 'Password'. The second section contains two input fields: 'Port' with the value '6001' and 'Channel' with a list of options: 'auto', '1', '4', '9', '16', and '32'. The 'auto' option is highlighted in orange. The third section contains a 'PushSet' toggle switch, which is currently set to 'On'. At the bottom of the screen, there is a red button labeled 'Delete Device'.


And you just need input the information of device. Please refer to the below descriptions.

Entry	Descriptions
Name	Any characters that you like to identify this device. Please be noted that the name should not duplicate with existing device's name.
Address	Target's IP address or URL, please be noted that if URL is used, the "http://" prefix should not be included.
Port	DVR's mobile port, 6003 by default
User	DVR's user name, Admin by default
Password	DVR's password, no password by default
Alarm(video push)	Turn on or off the video push function
Channel Number	Select the channel number, when assign auto , the app will set the number automatically.

- **Edit/Delete Device**

To Edit/Delete a device, Tap  open the Device list(as the below picture).

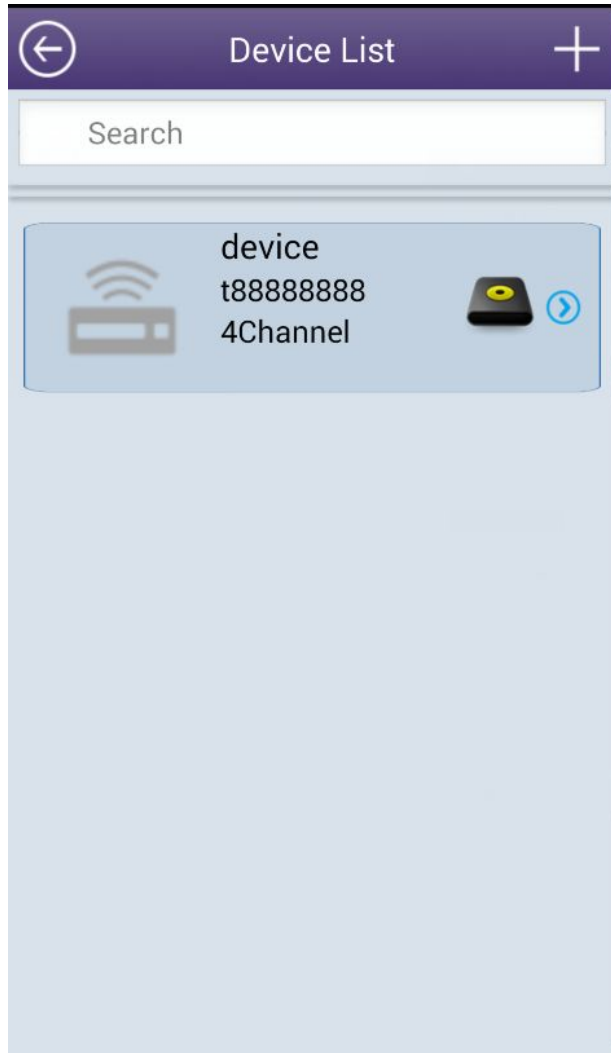

You can enter into editing mode by tapping the  of a certain row in the upper-right corner. Then you will go to the below window. You can modify device login information in this window. And at the bottom of this window, you can delete the device by click the red button

← EditDevice ✓

device

IPAddress t88888888

User Admin

Password Password

Port 6001

Channel auto 1 4 9 16 32


PushSet On Off

Delete Device

After revise, please tap  in the upper right corner.

4. Live View


When finish adding device, it will show the below playing window.

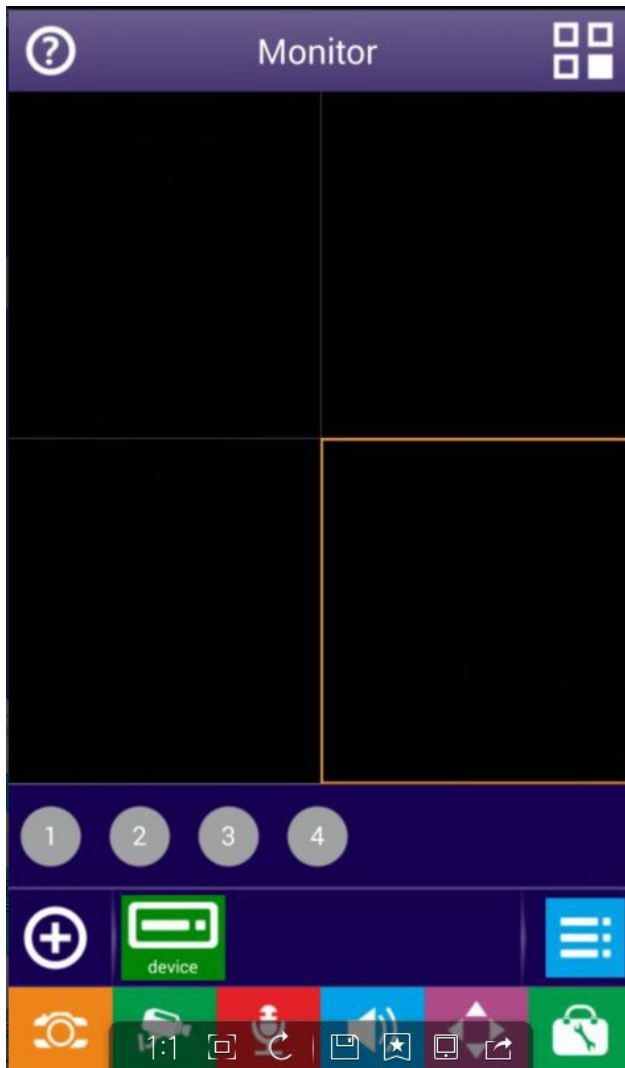


To start a live video, tap the Device icon, then tap the channel you want.


Repeat above steps to connect to other channels of the device or another devices.


When some channel is selected, the channel circle icon's color will turn into bright-green. Tap the bright-yellow icon, the channel video will stop and the channel circle icon color becomes gray.(as the below picture)

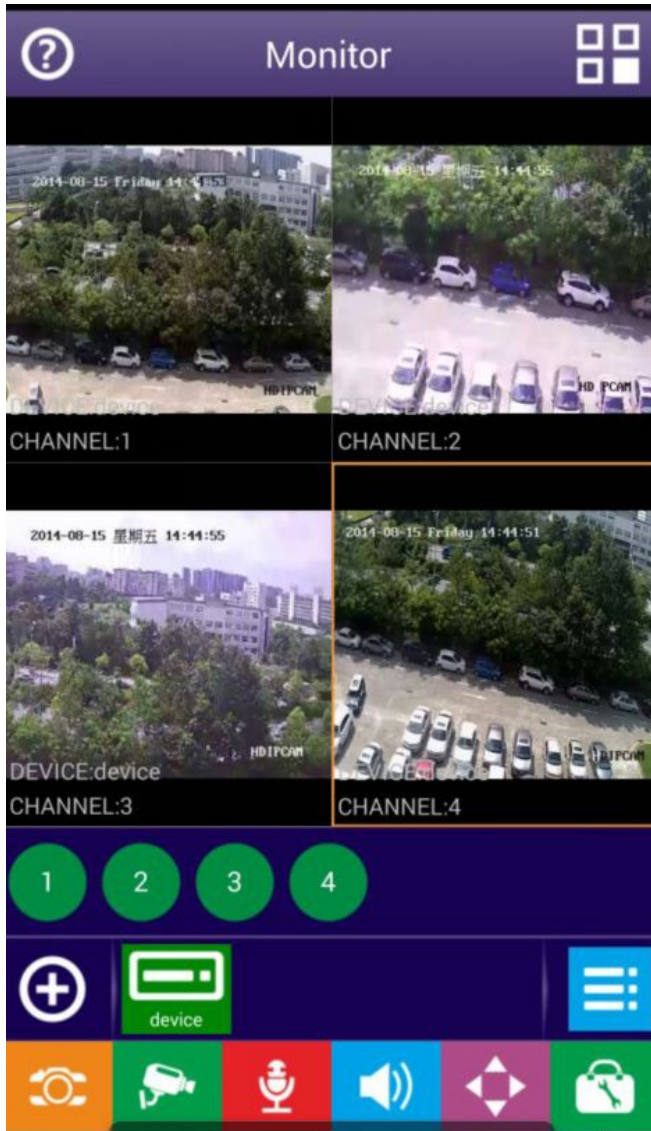

5• PTZ Control

Tap  to open the PTZ Control panel. Then you can control the PTZ by the panel.

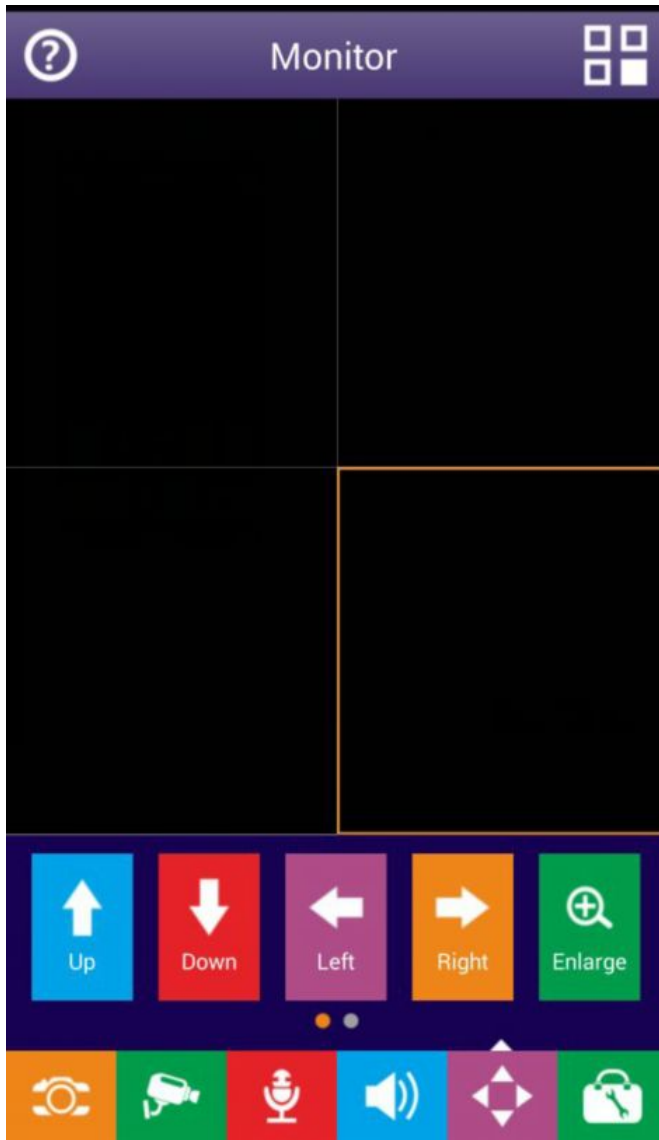

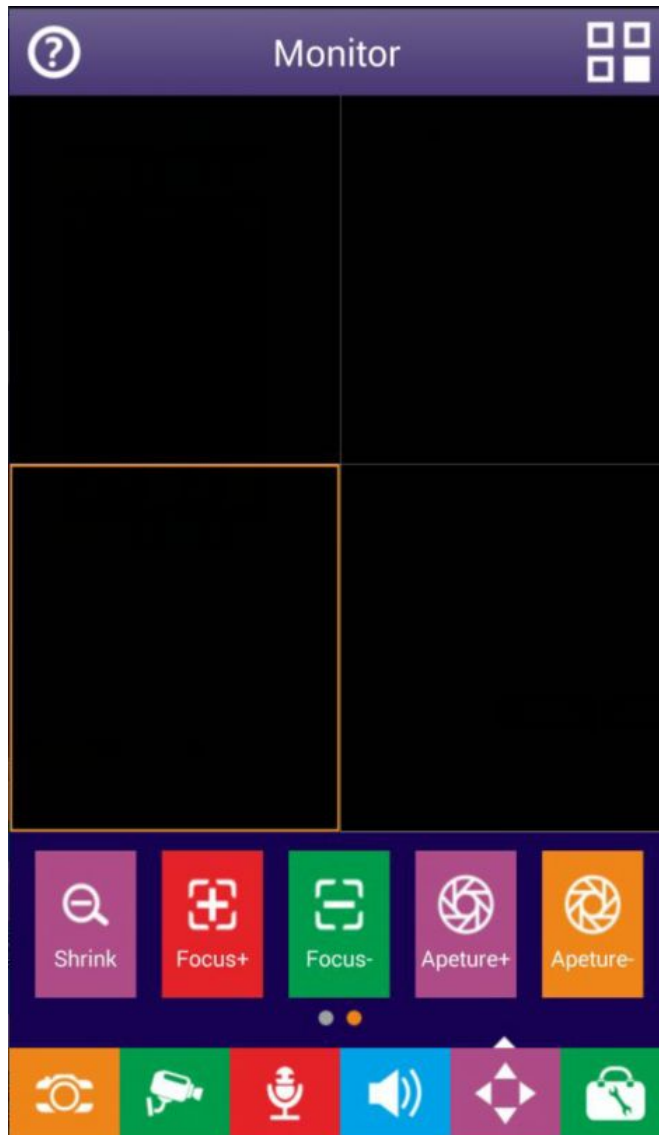




To hide the panel, you can either tap the button  again or tap any places of the screen.

6 Set up


• Snapshot and Record Playback

You can snapshot the live video by  and start/stop recording the live video by . These snapshot and recording files are saved in the android mobile device.

Tap  to visit the Snapshots & Record files, you can playback or delete the files from the below window.



9• Help and support

If you have problems of using this app, please click the panel button  , then you will get below pictures:




help

Current Version: V2.0.7

help

Check for updates



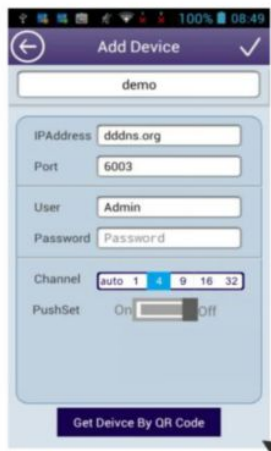

OK
Any characters that you like to identify this device.
← P2P ID
← cell Phone port.
← user name.
← password.
Select the channel number, when assign, the app will set the number automatically.



Software / Network



← Device ID